


**Technical features**



**102201**

# NANOSPOT MICRO STEEL HP

Projector for outdoor installation on a façade/wall. Completely realized in stainless steel AISI 316L, tempered safety glass, moulded silicone gasket and stainless steel screws. Constant voltage 24V DC remote driver needed. With 1 x XP-G3 CREE LED. IP66 rating.




**Technical data**

Wattage	3 WATT
IP Rating	IP66
IK Rating	IK09
Material	Stainless steel AISI 316L
Light source	1 x CREE "XP-G3" LED
Screws	Stainless steel
Remote driver:	Constant voltage 24V DC
Gasket	Silicone rubber
Glass	Tempered
Power cable	1,5 mt. power cable included
Gross weight	0,80 Kg

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
<b>3000°K warm-white</b>			
high-power led	10°	250	83.33
high-power led	30°	240	80.00
high-power led	45°	230	76.66
<b>4000°K neutral-white</b>			
high-power led	10°	270	90.00
high-power led	30°	260	86.66
high-power led	45°	250	83.33
<b>2700°K CCT</b> available on request			

**Finish color options:**

- Stainless Steel

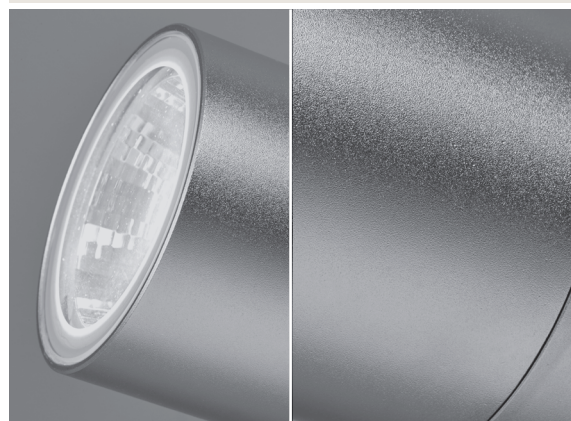

## OTHER VIEW




## OPTIONAL

AC044  
SPIKE




AC094  
HONEYCOMB LOUVER



AC038  
TREE STRAP



AC126  
ANTI-GLARE SNOOT



### remote driver selection

brand	manufacturer code	type	watt	IP rate	numbers of fixtures
Meanwell	LPV-20-24	constant voltage 24V DC	20W	IP67	min 1 - max 4
Meanwell	LPV-35-24	constant voltage 24V DC	35W	IP67	min 1 - max 7
Meanwell	LPV-60-24	constant voltage 24V DC	60W	IP67	min 1 - max 12