





505003

NANOSTEP ROUND

Round shape wall-recessed luminaire for outdoor installation. Body and frontal cover in hard anodized aluminum with phospho-chromatised and polyester powder coating, tempered safety glass, moulded silicone gasket. Asymmetrical oval wide light distribution. Remote constant current max 700mA driver needed, with 1 CREE XHP35 LED. IP68 rating.

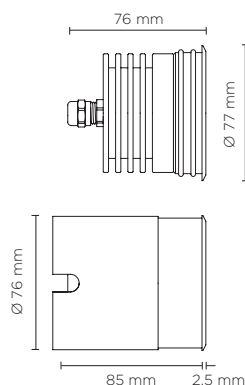

350 mA - LED POWER 5W

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	 8°x35° ELLIPTICAL	460	92.00
3000°K warm-white			
high-power led	 8°x35° ELLIPTICAL	474	94.80
4000°K neutral-white			
high-power led	 8°x35° ELLIPTICAL	484	96.80

Finish color options:



Technical features






Technical data




Wattage	MAX 10 WATT
IP Rating	IP68
IK Rating	IK08
Material	Hard anodized aluminum body and trim
Coating	Polyester powder coating with phosphochromating pre-finish
IK Rating	1 x CREE XHP35 LED
Screws	Stainless steel
Remote driver	Constant current max 700mA
Gasket	Silicone rubber
Glass	Tempered
Cable gland	M12
Power cable	0.3 mt. power cable included
Gross weight	1,30 Kg



500 mA - LED POWER 8W

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	 8°x35° ELLIPTICAL	622	77.75
3000°K warm-white			
high-power led	 8°x35° ELLIPTICAL	642	80.25
4000°K neutral-white			
high-power led	 8°x35° ELLIPTICAL	656	82.00

700 mA - LED POWER 10W

light source	light beam options	lumen output (lm)	lumin. efficacy (lm/w)
2700°K warm-white			
high-power led	 8°x35° ELLIPTICAL	836	83.60
3000°K warm-white			
high-power led	 8°x35° ELLIPTICAL	846	84.60
4000°K neutral-white			
high-power led	 8°x35° ELLIPTICAL	863	86.30

remote driver selection

brand	manufacturer code	type	watt	IP rate	numbers of fixtures
ALVIT Italy	AL1435S-IP	constant current 350mA	14W	IP67	min 1 - max 2
ALVIT Italy	AL1450S-IP	constant current 500mA	14W	IP67	1
ALVIT Italy	AL1470S-IP	constant current 700mA	14W	IP67	1
TCI Italy	152014/350	constant current 350mA	17W	IP68	min 1 - max 3
TCI Italy	152014/500	constant current 500mA	24W	IP68	min 1 - max 3
TCI Italy	152014/700	constant current 700mA	30W	IP68	min 1 - max 3

