




803001 - 803002

# SINGLE BOOK POLE TOP MAXI


Square pole-top mounted floodlight for outdoor installation on a pole diam. 60 mm or 76 mm. Phospho-chromatised and polyester powder coated die-cast copper-free aluminium body, tempered safety glass, moulded silicone gasket and stainless steel screws. Flange for pole diam. 60 mm or 76 mm included. Built-in LED driver 220-240V 50-60Hz, with 12 or 24 CREE XP-G3 LED. IP65 rating.

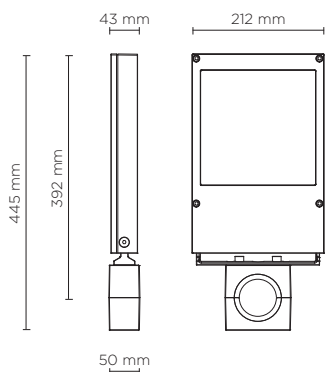

CYCLE ROUTE / PEDESTRIAN



STREET

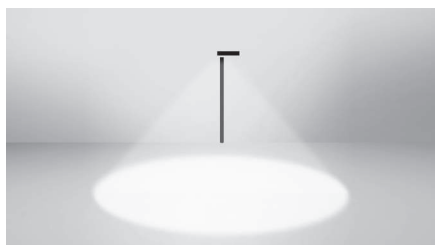

## Technical features





## Available on request



## Technical data

IP Rating	IP65
IK Rating	IK08
Material	High corrosion resistance die-cast copper-free aluminum body
Coating	Polyester powder coating with phosphochromating pre-finish
Screws	Stainless steel
Light source	NR. 12 -> 24 x 1.5W CREE "XP-G3" LED
Gasket	Silicone rubber
Glass	Tempered
Transformer	Electronic transformer 220/240V 50/60Hz included
Cable gland	Double nickel-plated brass cable gland PG9
Power cable	3 m neoprene power cable included
Weight	3,00 Kg





803001	<b>SINGLE BOOK POLE - TOP MAXI 12 LED</b> 18 WATT 220-240V 50-60HZ ELECTRONIC		
<b>light source*</b>	<b>light beam options</b>	<b>lumen output (lm)</b>	<b>lumin. efficacy (lm/w)</b>
<b>3000°K warm-white</b>			
high power led	 cycle route pedestrian	1.728	96.00
high power led	 street	1.728	96.00

\* Other light colors available on request: Neutral-white

#### Colors options

 Textured Grey RAL 9006     Anthracite Grey RAL 7016     Matt Black (on request)




803002	<b>SINGLE BOOK POLE - TOP MAXI 24 LED</b> 36 WATT 220-240V 50-60HZ ELECTRONIC		
<b>light source*</b>	<b>light beam options</b>	<b>lumen output (lm)</b>	<b>lumin. efficacy (lm/w)</b>
<b>3000°K warm-white</b>			
high power led	 cycle route pedestrian	3.456	96.00
high power led	 street	3.456	96.00


\* Other light colors available on request: Neutral-white

#### Colors options


 Textured Grey RAL 9006     Anthracite Grey RAL 7016     Matt Black (on request)



## POLES & ACCESSORIES

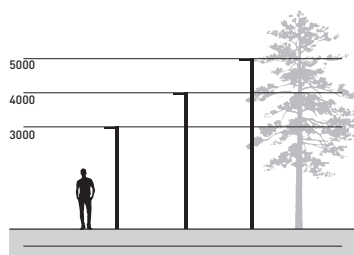

BURIED POLES			
code	article	h. mm.	description
809901	cylindrical pole 3,5 meters to be buried	3.500	Cylindrical pole made in steel S235JR (UNI EN 10219) hot galvanized (UNI EN 1461), <b>diameter 76 mm, thickness 4 mm.</b>
809902	cylindrical pole 4,5 meters to be buried	4.500	Phospho-chromatised and polyester powder coated. <b>Total height including 500 mm to be buried into the ground. Includes IP54 cover plate 132x38 mm and terminal block in double insulation.</b>
809903	cylindrical pole 5,5 meters to be buried	5.500	
809909	Top cap for pole diam. 76 mm.		



POLES WITH BASE-PLATE			
code	article	h. mm.	description
809904	cylindrical pole 3 meters with base-plate	3.000	Cylindrical pole made in steel S235JR (UNI EN 10219) hot galvanized (UNI EN 1461), <b>diameter 76 mm, thickness 4 mm.</b>
809905	cylindrical pole 4 meters with base-plate	4.000	Phospho-chromatised and polyester powder coated. <b>With base plate dim. 250x250 mm, thickness 10 mm</b>
809906	cylindrical pole 5 meters with base-plate	5.000	<b>Includes IP54 cover plate 132x38 mm and terminal block in double insulation.</b>
809907	anchorage unit for base-plate		<b>Base plate dim. 250x250 mm, thickness 3 mm, made in galvanized steel complete of nr. 4 anchorage threaded bolts</b>
809909	Top cap for pole diam. 76 mm.		

