

## Fittings / Downlights


# Firestay Duo 4/6W LED CCT Wattage Switchable Downlight - Tool Free Lever Connector - Bezels Sold Separately



The Firestay Duo LED CCT is a High Output Downlight ideal for high ceilings or any project requiring high intensity light, 4 way colour and 2 wattages switchable straight out of the box. With an 8-year product warranty, the front facing switch enables the user to seamlessly change the colour temperature (2700/3000/4000/6000K) to suit the mood of any space while the rear facing wattage switch enable you to instantly dictate the light level of any commercial or residential premises.

- Firestay Certification: 30, 60 and 90 minute solid joist ceilings, 30 minute I-Joist & Metal Web ceiling systems.
- IP65.
- Front CCT switch.
- 8 in 1 Fixture: 4 colour temperatures, 2 wattages.
- White, Satin, Chrome, Brass, Antique Brass & Matt Black bezels available.
- Part B / C / E compliant.
- Lever Tool-Free Terminal.
- 60° Beam Angle.
- Spacer plate options available.
- Mains Dimmable as standard.

## Technical Specification

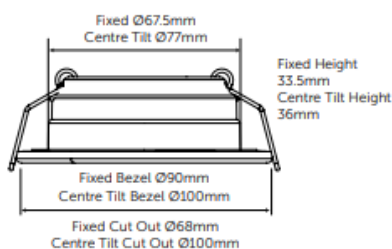

Product Code

11370V2

## Reference

Guarantee	8 Years
EAN	5013588900025
Commodity Code	9405423990
Country of Origin	CN
UNSPSC Code	39111515

## Technical Specification

Watts (W)	4/6
Volts (V)	220/240
Colour Temp (K)	2700/3000/4000/6000
Lumens (lm)	475-740
Lumens per Watt (lm/W)	119-123
Candelas (cd)	380-580
CRI (ra)	85
Frequency (Hz)	50/60
Life Hours	50000
Energy Rating	F
Impact Protection	IK7
IP Rating	IP65
Dimmable?	Yes

## Dimensions

Height (mm)	33.5
Diameter (mm)	90
Downlight Cut Out (mm)	68

## Packaging Information

Height (mm)	33.5
Diameter (mm)	90
Downlight Cut Out (mm)	68
Individual Product Weight (kg)	0.195
Single Carton Height (mm)	80
Single Carton Width (mm)	97
Single Carton Depth (mm)	95
Single Carton Weight (kg)	0.235
Individual Volume	0.0007372
Inner Box Qty	10
Inner Box Height (mm)	490
Inner Box Width (mm)	200
Inner Box Depth (mm)	90
Inner Box Weight (kg)	2.7
Inner Box Volume	0.00882
Outer Box Qty	20
Outer Box Height (mm)	507
Outer Box Width (mm)	224
Outer Box Depth (mm)	218
Outer Box Weight (kg)	5.6
Outer Box Volume	0.02476
Plastic Packaging Weight (kg)	0.035